


# Programming Quick Guide

## -LS6400A/LS6420A

### Installation

Make sure that the scanner has the correct cable to plug in the PC as below described:

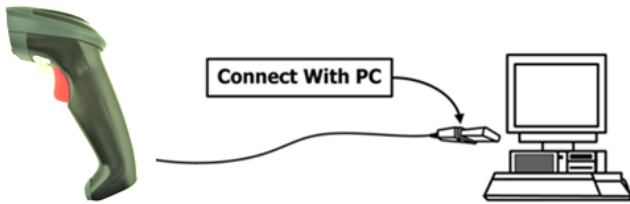

### Reset Configuration to Defaults

(For USB HID)  
If you are unsure of the scanner configuration or have scanned the incorrect codes, please scan from A1 to A2. This will reset the scanner to its factory defaults.



### Keyboard Country (FOR USB HID Only)

Scan the appropriate country code as below to program the keyboard layout for your country or language. As a general rule, the following characters are supported, but need special care for countries other than the United States: @ | \$ # { } [ ] = / ' \ < > ~



USA  
(Original setting)



Denmark



France



Italy



Japan



Finland



Germany



Norway

### Auto sensing(For LS6420A only)



### Symbologies – 1



CODE 39



UPC-A



EAN-13



EAN-8















CODE 93













CODE 128



## Symbologies – 2

ENABLE 	<u>CODABAR</u>	DISABLE 
ENABLE 	<u>INTERLEAVED 25</u>	DISABLE 
ENABLE 	<u>INDUSTRIAL 25</u>	DISABLE 
ENABLE 	<u>MSI</u>	DISABLE 
ENABLE 	<u>PLESSEY</u>	DISABLE 
ENABLE 	<u>CODE 11</u>	DISABLE 

## Symbologies – 3

ENABLE 	<u>MATRIX 25</u>	DISABLE 
ENABLE 	<u>POSTCODE 25</u>	DISABLE 
ENABLE 	<u>AVIATION 25</u>	DISABLE 
ENABLE 	<u>GS1 Omnidirectional</u>	DISABLE 
ENABLE 	<u>GS1 Limited</u>	DISABLE 

- Information in this document is subject to change without notice.
- For more information, please visit: [www.riotec.com.tw](http://www.riotec.com.tw)