


# Programming Quick Guide

## - OM7220J

### Installation

Make sure that the scanner has the correct cable to plug in the PC as below described::

**\*Note :** Please install PL-2303 driver for USB serial

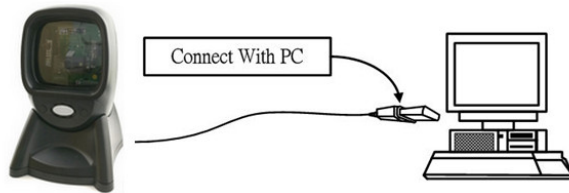

### Reset Configuration to Default :

(For USB HID, RS232, USB Serial)

If you are unsure of the scanner configuration or have scanned the incorrect codes, please scan the following barcode. This will reset the scanner to its factory defaults.



### Keyboard Language (For USB HID Only)

Scan the barcode corresponding to the keyboard type



USA  
(Original setting)



Italy



Portuguese (Brazil)



France



Spanish



Portuguese (Portugal)

### 1D Symbologies – 1



CODABAR



CODE 39



Interleaved 25



Industrial 25



### 1D Symbologies – 2



Matrix 25



CODE 93



CODE 128



GS1-128



UPC-A



UPC-E



EAN 8



EAN 13



ISBN



## 1D Symbologies – 3

## 2D Symbologies

<b>ENABLE</b> 	<u>ISSN</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>GS1 DataBar</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>GS1 Databar Limited</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>GS1 Databar Expanded</u> 	<b>DISABLE</b> 

<b>ENABLE</b> 	<u>PDF 417</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>QR Code</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>Micro QR Code</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>Data Matrix</u> 	<b>DISABLE</b> 
<b>ENABLE</b> 	<u>Aztec Code</u> 	<b>DISABLE</b> 

- Information in this document is subject to change without notice.
- For more information, please visit: [www.riotec.com.tw](http://www.riotec.com.tw)